



**Flow-rate**  
up to  
**85** l/min  
(up to 22,4 gpm)



DISPENSERS

PUMPS

METERS

NOZZLE METERS

NOZZLE

SPECIAL EQUIPMENTS

FLUID MONITORING



HOSE REEL

FILTERING

ACCESSORIES



Bipump

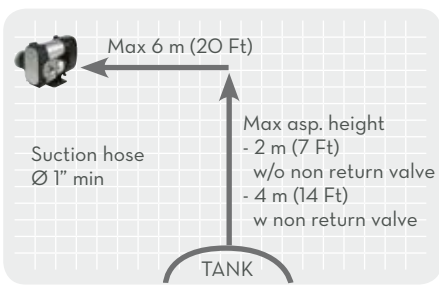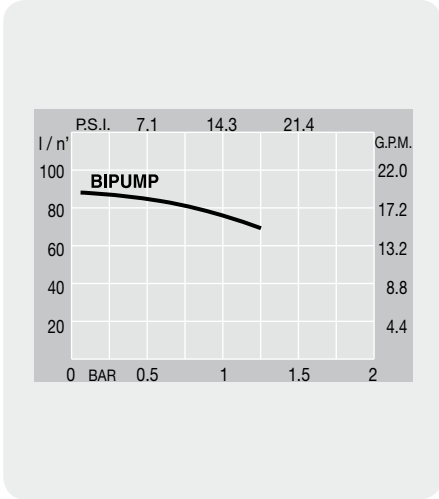

**FEATURES**



**ON REQUEST**



**PRODUCTS' RANGE TECHNICAL DATA**

Code	Description	Fluids		Flow-rate		Voltage			Duty cycle		rpm	Inletw BSP
		type		l/min	gpm	DC Volt	Power Watt	Amp. max.	min.			
F00363A0A	Bipump 12V with on/off switch	D		85	22,4	12	500	42	30	2000	1"	
F00363B0A	Bipump 24V with on/off switch	D		85	22,4	24	500	21	30	2000	1"	
F0036301A	Bipump 12V with cable 2 m	D		85	22,4	12	500	42	30	2000	1"	
F0036302A	Bipump 12V with cable 4 m	D		85	22,4	12	500	42	30	2000	1"	
F0036303A	Bipump 24V with cable 2 m	D		85	22,4	24	500	21	30	2000	1"	
F0036304A	Bipump 24V with cable 4 m	D		85	22,4	24	500	21	30	2000	1"	
F0036321A	Bipump 12/24 without on/off switch	D		85	22,4	12/24	500/500	42/21	30/30	2000	1"	
R14334000	Kit cable 2 m											
R14335000	Kit cable 4 m											
F14200000	Kit handle											